


## CURRENT SENSOR

---

Product series: STK-CTS/W1

Product part number: STK-25CTS/W1

Version: Ver 1.0

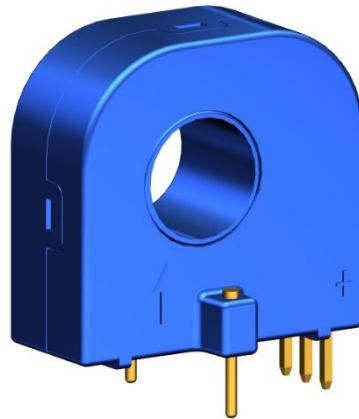

---

## CONTENTS

|                                       |   |
|---------------------------------------|---|
| 1. Description.....                   | 2 |
| 2. STK-25CTS/W1 parameters.....       | 3 |
| 3. Frequency band width.....          | 4 |
| 4. Step response time.....            | 4 |
| 5. Frequency delay performace.....    | 5 |
| 6. Install on PCB.....                | 6 |
| 7. Dimensions & Pins & Footprint..... | 7 |

## 1. Description

STK-CTS/W1 series current sensors are based on open loop principle with TMR technology. The sensor can detect those current with DC, AC, pulse and irregular wave shape.

### Typical application

- Variable speed driving
- continuous current dynamo
- Weld machine power supply

### General Parameter

| Parameter           | Symbol | Unit | Value     |
|---------------------|--------|------|-----------|
| Working temperature | T_A    | °C   | -40 ~ 105 |
| Storage temperature | T_stg  | °C   | -40 ~ 105 |
| Mass                | m      | g    | 10        |

### Absolute Parameter

| Parameter        | Symbol           | Unit | Value |
|------------------|------------------|------|-------|
| Supply voltage   | V <sub>C</sub>   | V    | 5.5   |
| ESD rating (HBM) | U <sub>ESD</sub> | kV   | 4     |

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

### Isolation parameters

| Parameter                      | Symbol          | Unit | Value                 | Remark                              |
|--------------------------------|-----------------|------|-----------------------|-------------------------------------|
| Isolation voltage, 50Hz, 1 min | U <sub>d</sub>  | kV   | 4                     |                                     |
| Impact voltage 1.2/ 50s        | Ū <sub>w</sub>  | kV   | 6                     |                                     |
| Clearance                      | d <sub>Cl</sub> | mm   | > 8                   | Shortest distance through air       |
| Creepage distance              | d <sub>Cp</sub> | mm   | > 8                   | Shortest distance along device body |
| Case material                  |                 |      | V0 according to UL 94 |                                     |

## 2. STK-25CTS/W1 parameters

Condition:  $V_{cc} = 5.0\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , unless specified.

| Parameters          | Symbol       | Unit          | Min. | Typ.    | Max. | Remark                                    |
|---------------------|--------------|---------------|------|---------|------|---|
| Primary current     | $I_{pn}$     | A             |      | 25      |      |   |
| Maximum current     | $I_{pm}$     | A             | -25  |         | 25   |   |
| Supply voltage      | $V_{cc}$     | V             | 4.75 | 5       | 5.25 |   |
| Consumption current | $I_{cc}$     | mA            |      | 5       | 10   |   |
| Full-scale output   | $V_{FS}$     | V             |      | $\pm 2$ |      | $(V_{out} @ \pm I_{pn}) - V_{off}$        |
| Output resistance   | $R_{out}$    | $\Omega$      |      | 1       |      | @ $V_{out}$                               |
| Offset voltage      | $V_{off}$    | V             | 2.48 | 2.5     | 2.52 | $V_{out} @ 0\text{ A}$                    |
| Theoretical gain    | $G_{th}$     | mV/A          |      | 80      |      | $2\text{ V} @ I_{pn}$                     |
| Gain error          | $Err_G$      | % $G_{th}$    | -0.5 |         | 0.5  | Adjusted@ $25^\circ\text{C}$              |
| Non-linearity       | Non-L        | % $I_{pn}$    | -0.5 |         | 0.5  | $\pm I_{pn}$                              |
| reaction time       | $t_{ra}$     | $\mu\text{s}$ |      | 30      |      | @10% of $I_{PN}$                          |
| Step response time  | $t_{res}$    | $\mu\text{s}$ |      | 120     |      | @90% of $I_{PN}$                          |
| Delay time          | $t_{delay}$  | $\mu\text{s}$ |      | 50      |      | @2 kHz                                    |
| -3 dB band width    | BW           | kHz           |      | 3.5     |      | Back-end non-RC circuit                   |
| Noise 1Hz~ 2 kHz    | $V_{noise}$  | mVpp          |      | 5       |      | @The filter is 14KHZ                      |
| Accuracy @ RT       | X            | % of $I_{pn}$ | -1   |         | 1    | @ $25^\circ\text{C}$                      |
| Accuracy            | $X_{TRange}$ | % of $I_{pn}$ | -2   |         | 2    | $-40^\circ\text{C} \sim 85^\circ\text{C}$ |

Note:

1. Accuracy @ RT,  $X = ((V_{out} @ I_n @ 25^\circ\text{C}) - (G_{fit} * I_n + V_{off} @ 25^\circ\text{C})) / V_{FS}$ , Here  $I_n$  is the current test current.  $G_{fit}$  is the normal temperature fitting gain.

2. Accuracy,  $X_{TRange} = ((V_{out} @ I_n @ T_x) - (G_{fit@25^\circ\text{C}} * I_n + V_{off} @ 25^\circ\text{C})) / V_{FS}$ , The fitting gain of the product at  $G_{fit@25^\circ\text{C}}$  is  $25^\circ\text{C}$ .

### 3. Frequency band width

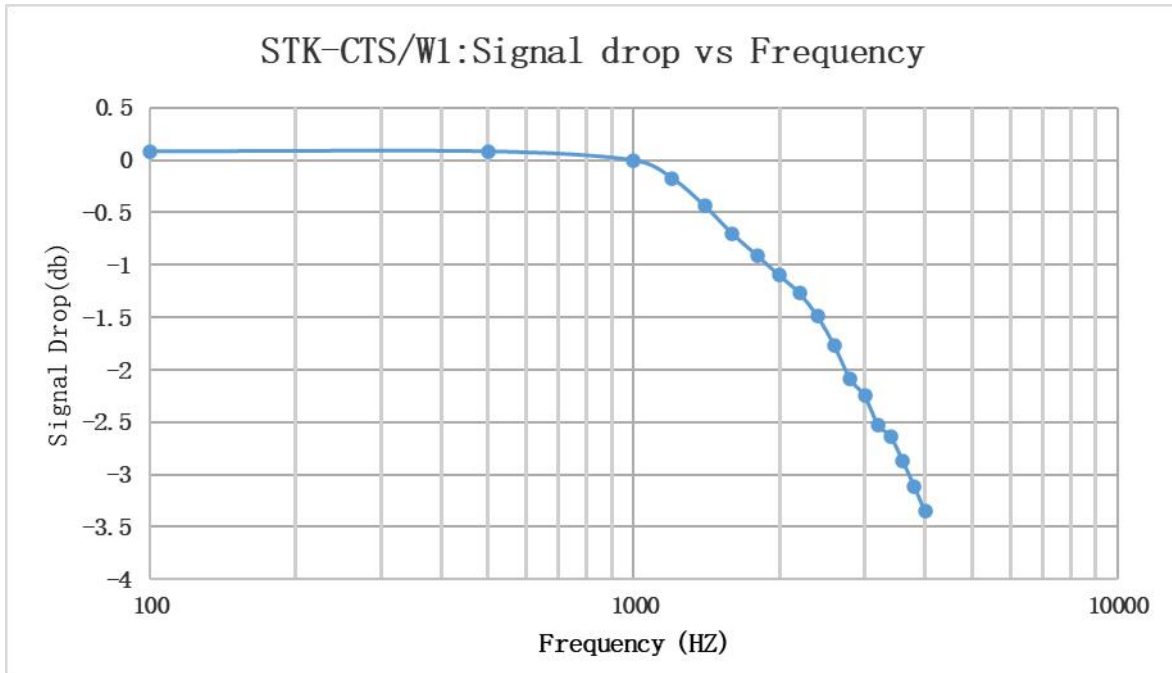


Fig.4 the band width of STK-CTS/W1 series current sensors. The bandwidth of the sensor is in the range of DC ~ 3.5 kHz (-3 dB).

### 4. Step response time

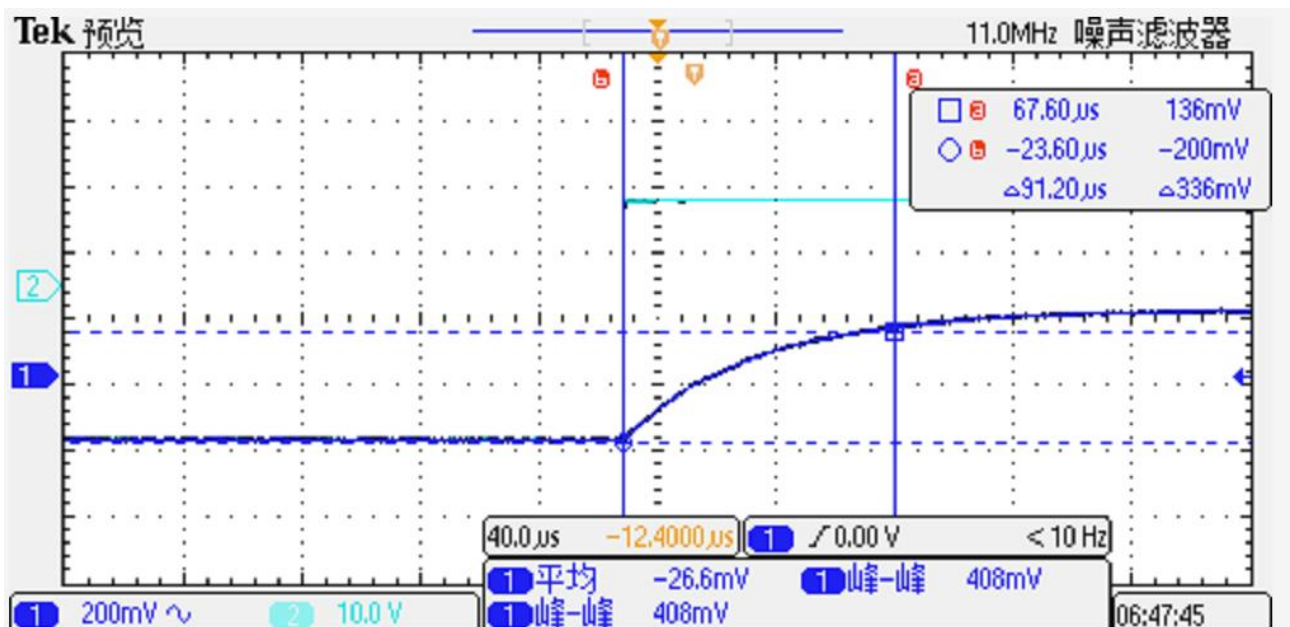


Fig.5 the step response time of STK-CTS/W1 current sensors. The light blue is primary current, while the dark blue is output signal of current sensor. The delay from 90% of the original current signal to 90% of the output of the sensor is less than 120 μ s.

## 5. Frequency delay performace


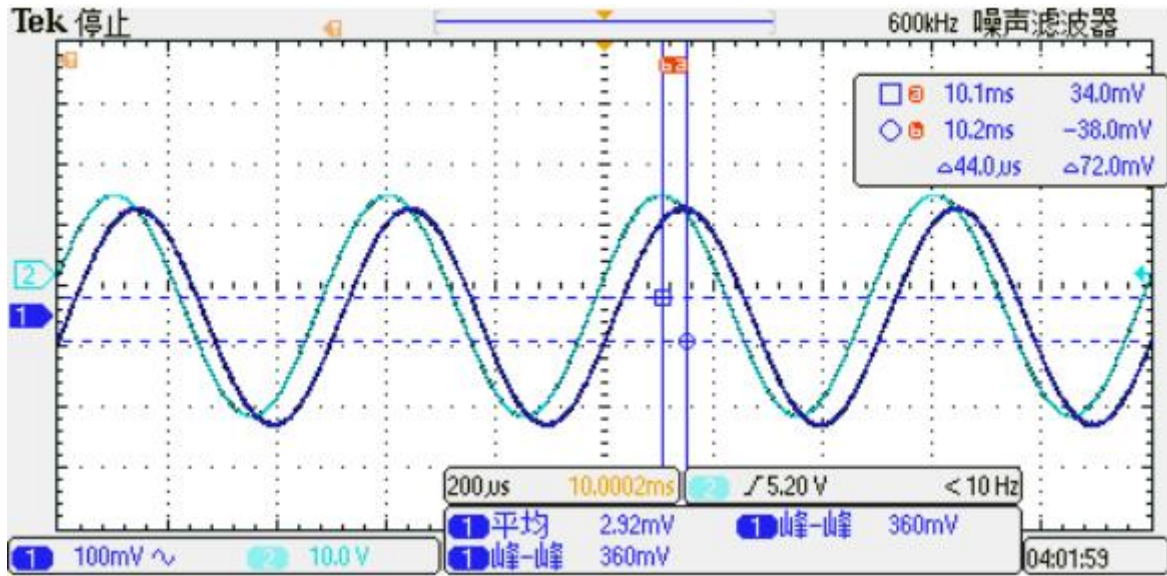


Fig.6 when detection the primary current with a frequency of 3.5 kHz. The typical results of the output of STK-CTS/W1 current sensor on the primary current delay characteristics. The delay time from primary current (light blue) to the output of the sensor (dark blue) is around 50  $\mu$  s.

## 6. Install on PCB



1. Installation angle: Overlooking (viewed from the side where the sensor is installed, unit: mm)
2. It is suggested that the aperture (diameter of secondary signal line  $\times 1.25$ ) mm of PCB should be installed.
3. Maximum PCB thickness 2.5 mm
4. Wave peak welding temperature curve:  $260\text{ }^{\circ}\text{C} \times 10\text{ s}$

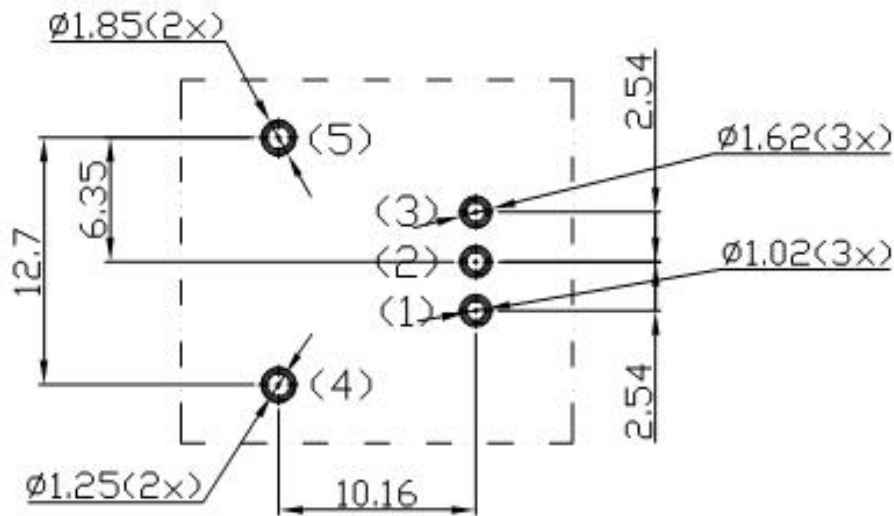

**Safe:** This current sensor shall be used in IEC61010-1-compliant energy limiting secondary circuits

- This current sensor is used in electronic / electrical equipment that meets the application standards and is subject to the manufacturer's safety operating requirements;
- When operating the current sensor, we should pay attention to the dangerous voltage of the original side current line;
- Failure to connect according to the diagram will cause damage to the product;
- Ignoring the warning can lead to serious consequences;
- Additional protective cover can be added;
- The main power supply must be disconnected.

## 7. Dimensions & Pins & Footprint

